

DTR-2230ST Series

TV CHANNEL CHANGER WITH INTEGRAL SPEAKER

Models

DTR-2233ST
DTR-2333ST
DTR-2331ST

Description

The DTR-2230 series of wall mounted remote TV controls are electrically similar to the DTR-2020 series except include a built in 5 watt speaker but without the volume control. This station has the channel change button located in a single gang and the speaker in the other.

Each model is built upon the popular decorator style chassis allowing for many mounting options. The channel change knob is an unmistakable red button built upon a low travel SPST momentary type switch.

The speaker is of 2.75" X 4" five watt alnico magnet type. Connection to the unit is via the pre-stripped color coded leads. When using this series, the installer must pre-set the audio level at the TV receiver.

Each DTR-2#2#SS comes complete with installation instructions, stainless steel trim plate, crimp connectors, and mounting screws.

Ordering Information

- DTR-2233ST** 2 gang TV Channel w/ speaker, stainless steel trim
- DTR-2333ST** 3 gang as above w/ dual speaker grilles, SS trim
- DTR-2331ST** 3 gang as above w/ headphone jack, SS trim

Features

Versatile design allows utilization in a variety of locations.

Highly noticeable red TV Channel button.

Well defined labeling for ease of operation.

Pre-wired and tested for easy installation.

Available in bi-lingual format.


Mounts onto standard 2 or 3 gang electrical backbox.

Can be combined with other decorator style of devices for mounting ease

TECHNICAL SPECIFICATIONS

1. Sizes: 2 gang: 4.5"H x 4.5"W x 1.5"D
3 gang: 4.5"H x 6.25"W x 1.5"D
2. Mounting: Two or Three gang as required by model variant
3. Faceplate: Stainless Steel Trim Plate. Uses standard decorator style wall plates.
4. Termination: Three- (3) color coded wires, 6" length for MCO attachment.
5. Insulation Resistance: >100M ohm to 500 VDC
6. Resistance Tolerance: <1M: 20%, >1M: 30%
7. Switch: Colored coded momentary SPST, N.O. contacts rated at 3A / 250V
8. Speaker: 2.75" x 4" five watt alnico magnet, 8 ohm impedance, 150 to 200Khz freq range

MOUNTING AND WIRING INFORMATION*

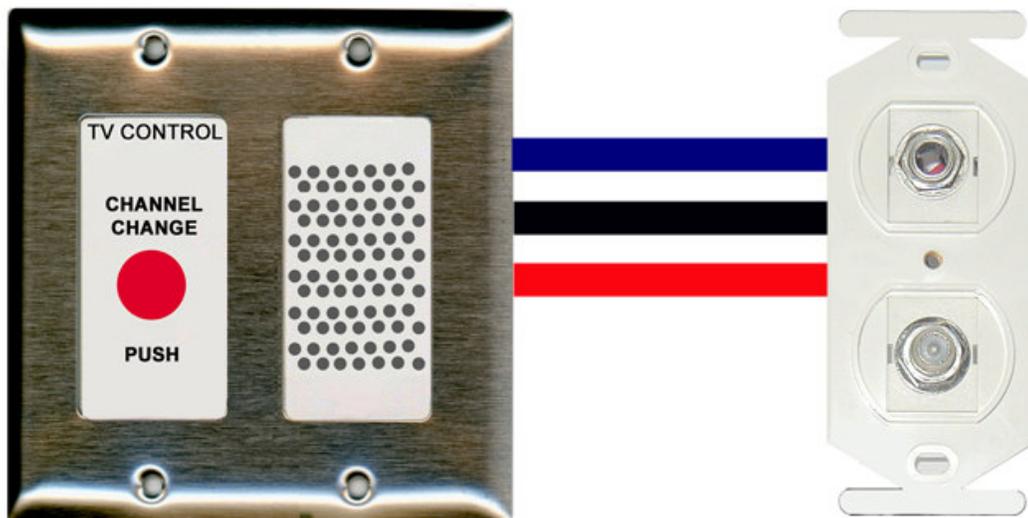

RD=RED
BL=BLUE
BK=BLACK

TV Audio High (+)
TV Channel Relay High (+)
TV Channel Common (Grd)

*Refer to Service and Installation Manual for detailed information regarding hook-up and set-up.

DICOM Services

1516 Maddox Lane
Monroe, GA 30656
Ph: 678-635-5860 or 770-616-5604
www.dicom2000.com

4/1/08 Rev 3
