

DTR-2310ST Series

TV VOLUME CONTROL WITH INTEGRAL SPEAKER

Models

DTR-2213ST
DTR-2311ST
DTR-2312ST
DTR-2313ST

Description

The DTR-2310 series of wall mounted remote TV controls are electrically similar to the DTR-2020 series except include a built in 5 watt speaker but without the channel change switch. This station has the volume control located in a single gang and the speaker in the other.

Each model is built upon the popular decorator style chassis allowing for many mounting options. The volume control knob is an unmistakable black button with a distinctive level pointer.

The speaker is of 2.75" X 4" five watt alnico magnet type. Connection to the unit is via the pre-stripped color coded leads. When using this series, the installer must pre-set the station channel at the TV receiver or use an IR remote.

Each DTR-231#SS comes complete with installation instructions, stainless steel trim plate, crimp connectors, and mounting screws.

Ordering Information

- DTR-2213ST** 2 gang TV Channel w/ speaker, stainless steel trim
- DTR-2311ST** 3 g. TV Channel w/ spkr, headphone jack, SS trim
- DTR-2312ST** 3 g. as above w/ spkr, hd jack, remote jk, SS trim
- DTR-2313ST** 3 gang as above w/ no jacks, SS trim

Features

Versatile design allows utilization in a variety of locations.

Easy-grip Volume knob With position pointer.

Well defined labeling for ease of operation.

Pre-wired and tested for easy installation.

Available in bi-lingual format.


Mounts onto standard 3 gang electrical backbox.

Can be combined with other decorator style of devices for mounting ease

TECHNICAL SPECIFICATIONS

1. Sizes: 3 gang: 4.5"H x 6.25"W x 1.5"D
2. Mounting: Three gang as required by model variant
3. Faceplate: Stainless Steel Trim Plate. Uses standard decorator style wall plates.
4. Termination: Two- (2) color coded wires, 6" length for MCO attachment.
5. Insulation Resistance: >100M ohm to 500 VDC
6. Resistance Tolerance: <1M: 20%, >1M: 30%
7. Volume Control: Linear taper, 250 Ohm, .335" shaft,
8. Speaker: 2.75" x 4" five watt alnico magnet, 8 ohm impedance, 150 to 200Khz freq range

MOUNTING AND WIRING INFORMATION*

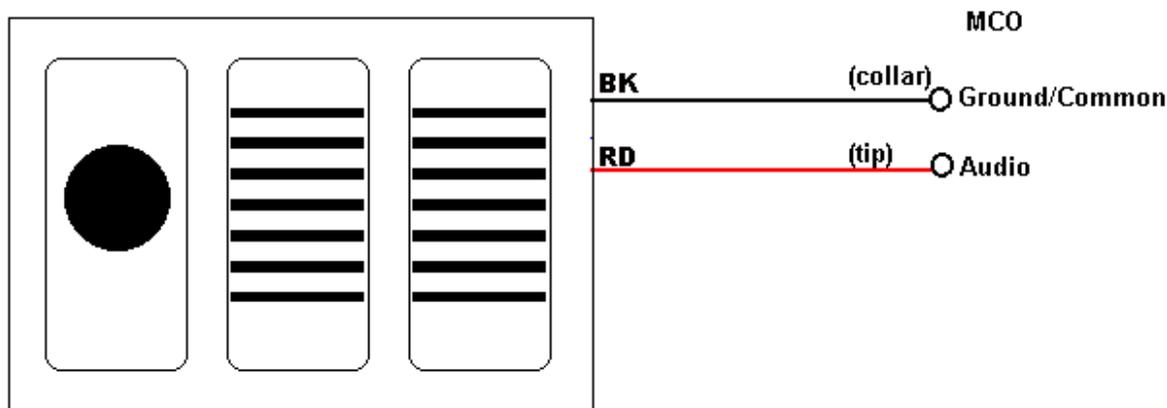

RD=RED
BK=BLACK

TV Audio High (+)
TV Channel Common (Grd)

*Refer to Service and Installation Manual for detailed information regarding hook-up and set-up.

DICOM Services

1516 Maddox Lane
Monroe, GA 30656
Ph: 678-635-5860 or 770-616-5604
www.dicom2000.com

4/1/11 Rev 3
